

DYDEN CORPORATION

ELECTRIC WIRES
& CABLES PRODUCTS

DATE. Aug. 26, 2009

SPEC. No. FSC09-748

SPECIFICATION

FOR

ETHYLENE TETRAFLUOROETHYLENE (ETFE) INSULATED
AND PVC JACKETED CABLE WITH SHIELD
(RMFES - SB - Kr (2517))

RoHS correspondence

signed by

Y. KAWANAMI

Manager
Engineering section
Engineering dept
Factory Automation & Robot Cable Division

1. SCOPE

This specification covers the construction, characteristics of the Ethylene Tetrafluoroethylene (ETFE) insulated and PVC jacketed cable with shield.

2. SYMBOL, SIZE

The symbol and size of the cable shall be
" RMFES-SB-Kr(2517) AWG25/20P "
(0.2mm²/20P)

3. UL STANDARD

RECOGNIZED by UNDERWRITERS LABORATORIES Inc.

STYLE No.	2517 (UL 758 : AWM)
Rating TEMP.	105°C
VOLT.	300V
USE	External interconnection of electronic equipment or internal wiring of electronic equipment or appliances.

4. FLAME TESTING

The cable shall pass the vertical wire flame test (VW-1) described in UL1581, Paragraph 1080.

5. CONSTRUCTION


The construction of the cable shall conform to Table 1.

6. CHARACTERISTICS

The characteristics of the cable shall be shown in Table 2.

7. MARKING

The following information shall be indicated with a suitable method to the cable.

" —DYDEN E91337  AWM 2517 105C 300V VW-1 -LF- RMFES-SB — "

* * * * *

Table 1 Construction


I T E M		VALUE
Symbol		RMFES-SB-Kr (2517)
Size	AWG (mm ²)	25 (0.2)
Conductor	Material	Tinned Annealed Copper
	Construction (No. /mm)	40/0.08
	Dia. (approx. mm)	0.58
Insulation	Material	ETFE
	Thickness (approx. mm)	0.20
	Dia. (approx. mm)	0.98
Twisting	Dia. (approx. mm)	2.0
Stranding	Center layer	7 P
	First layer	13 P
Tape	—	Binder tape
Shield (Braid)	Material	Tinned Annealed Copper
	Thickness (approx. mm)	0.35
Jacket	Material (color)	Low frictional • Smooth PVC (Black)
	Thickness (approx. mm)	1.2
Overall diameter (approx. mm)		13
Approx. mass (kg/km)		210

Table 2 Characteristics (at 20°C)

I T E M	STANDARD VALUE
Max. DC resistance of conductor (Ω/km)	107.3
Min. insulation resistance (MΩ-km)	100
Dielectric strength (V/min)	AC 2000

F i g 1

C r o s s - S e c t i o n o f C a b l e

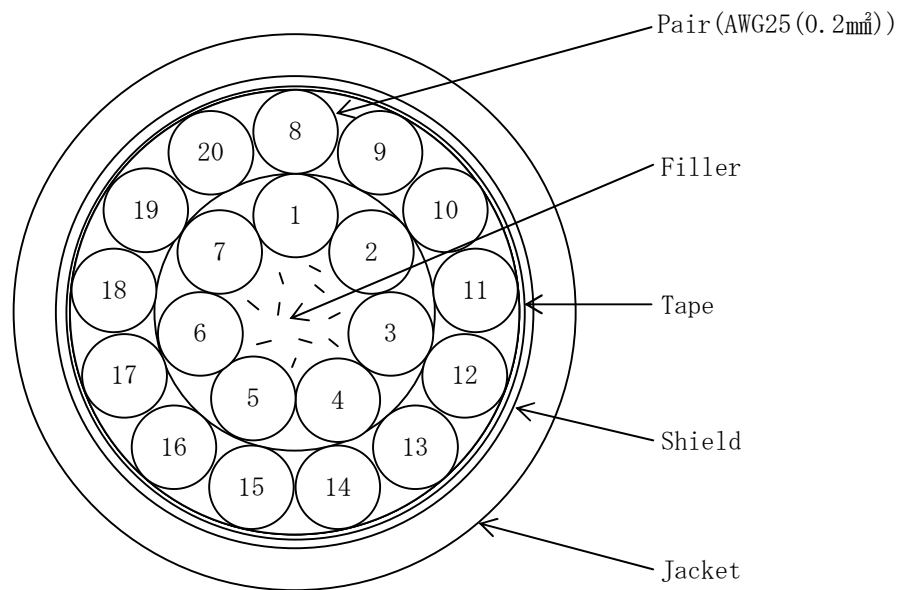

PairNo.	Colors
1	Blue×White
2	Yellow×White
3	Green×White
4	Red×White
5	Purple×White
6	Blue×Brown
7	Yellow×Brown
8	Green×Brown
9	Red×Brown
10	Purple×Brown
11	Blue×Black
12	Yellow×Black
13	Green×Black
14	Red×Black
15	Purple×Black
16	Blue×Gray
17	Yellow×Gray
18	Green×Gray
19	Red×Gray
20	Purple×Gray

NOT TO SCALE