

DYDEN CORPORATION

ELECTRIC WIRES
& CABLES PRODUCTS

DATE Jan, 30, 2014
SPEC. No. JS04-333B

SPECIFICATION

FOR

CROSS-LINKED POLYETHYLENE (XLPE) INSULATED
AND PVC JACKETED CABLE WITH SHIELD

(RMCV-SB-A (20276))

RoHS correspondence



signed by *K. Nishimura*
K. NISHIMURA

Manager
Engineering section
Engineering dept
Factory Automation & Robot Cable Division

1. SCOPE

This specification covers the construction, characteristics of the Cross-Linked Polyethylene(XLPE) insulated and PVC jacketed cable with shield .

2. SYMBOL, SIZE

The symbol and size of the cable shall be

” RMCV-SB-A(20276) AWG25/2C ”
(0.2mm²/2C)

3. UL STANDARD

RECONGNIZED by UNDERWRITERS LABORATORIES Inc.

STYLE No.	20276 (UL 758 : AWM)
Rating TEMP.	80°C
VOLT.	30V
USE	Construction A Internal wiring or external interconnection of electronic equipment in Class 2 circuits only.

4. FLAME TESTING

The cable shall pass the vertical wire flame test (VW-1) described in UL1581, Paragraph 1080.

5. CONSTRUCTION


The construction of the cable shall conform to Table 1.

6. CHARACTERISTICS

The characteristics of the cable shall be shown in Table 2.

7. MARKING

The following information shall be indicated with a suitable method to the cable.

” —DYDEN E91337  AWM 20276 80C 30V VW-1 -LF- — ”

* * * * *

Table 1 Construction

I T E M		V A L U E
Symbol		RMCV-SB-A(20276)
Size	AWG(mm ²)	25 (0.2)
Conductor	Material	Annealed Copper
	Construction(No./mm)	40/0.08
	Dia. (approx. mm)	0.58
Insulation	Material	XLPE
	Thickness(approx. mm)	0.635
	Dia. (approx. mm)	1.85
Stranding	Center layer	2 C
Tape	—	Binder tape
Drainwire	Material	Tinned Annealed Copper (40/0.08mm)
Shield (Braid)	Material	Tinned Annealed Copper
	Thickness(approx. mm)	0.25
Jacket	Material(color)	Flame retardant • Oil resistant PVC (Black)
	Thickness(approx. mm)	0.55
Overall diameter(approx. mm)		6
Approx. mass(kg/km)		45


Table 2 Characteristics (at 20°C)

I T E M	S T A N D A R D V A L U E
Max. DC resistance of conductor(Ω /km)	101.9
Min. insulation resistance (M Ω -km)	100
Dielectric strength (V/min)	AC 500
Characteristic impedance (at TDR)	※130 (differential)

※Standard value

F i g 1

C r o s s - S e c t i o n o f C a b l e

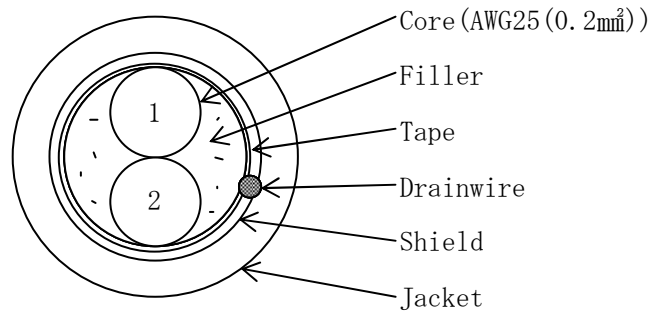

CoreNo.	Colors
1	Black
2	Red

NOT TO SCALE

Revision process

Revised Date	Rivised Items
2004, 7, 20	The first edition
2006, 9, 12 Edition A	Change of Cable Marking : (addition of "-LF-")
2009, 1, 14 Edition B	The addition of RoHS correspondence Change of Cable Marking : (DAIDEN K.K. → DYDEN)