

DYDEN CORPORATION

ELECTRIC WIRES
& CABLES PRODUCTS

DATE Jan, 14, 2011

SPEC. No. FSC11-037

SPECIFICATION

FOR

ETHYLENE TETRAFLUOROETHYLENE (ETFE) INSULATED
AND PVC JACKETED CABLE

(RMFES - Kr (2586))

RoHS correspondence

signed by *K. Nishimura*
K. NISHIMURA

Engineering section
Engineering dept
Factory Automation & Robot Cable Division

1. SCOPE

This specification covers the construction, characteristics of the Ethylene Tetrafluoroethylene (ETFE) insulated and PVC jacketed cable .

2. SYMBOL, SIZE

The symbol and size of the cable shall be

" RMFES-Kr(2586) AWG12/4C "
(3.5mm²/4C)

3. UL STANSARD

RECONGNIZED by UNDERWIRITERS LABORATORIES Inc.

STYLE No.	2586 (UL 758 : AWM)
Rating TEMP.	105°C
VOLT.	600V
USE	External interconnection or internal wiring of electronic equipment.

4. FLAME TESTING

The cable shall pass the vertical wire flame test (VW-1) described in UL1581, Paragraph 1080.

5. CONSTRUCTION


The construction of the cable shall conform to Table 1.

6. CHARACTERISTICS

The characteristics of the cable shall be shown in Table 2.

7. MARKING

The following information shall be indicated with a suitable method to the cable.

" —DYDEN E91337  AWM 2586 105C 600V VW-1 -LF- RMFES — "

* * * * *

Table 1 Construction


I T E M		V A L U E
Symbol		RMFES-Kr (2586)
Size	AWG (mm ²)	12 (3.5)
Conductor	Material	Tinned Annealed Copper
	Construction (No./mm)	7/64/0.10
	Dia. (approx. mm)	2.60
Insulation	Material	ETFE
	Thickness (approx. mm)	0.40
	Dia. (approx. mm)	3.40
Stranding	Center layer	4 C
Tape	—	Binder tape
Jacket	Material (color)	Flame retardant • Smooth PVC (Black)
	Thickness (approx. mm)	1.1
Overall diameter (approx. mm)		10.5
Approx. mass (kg/km)		220

Table 2 Characteristics (at 20°C)

I T E M	S T A N D A R D V A L U E
Max. DC resistance of conductor (Ω/km)	6.01
Min. insulation resistance (MΩ-km)	100
Dielectric strength (V/min)	AC 2000

Fig 1

Cross-Section of Cable

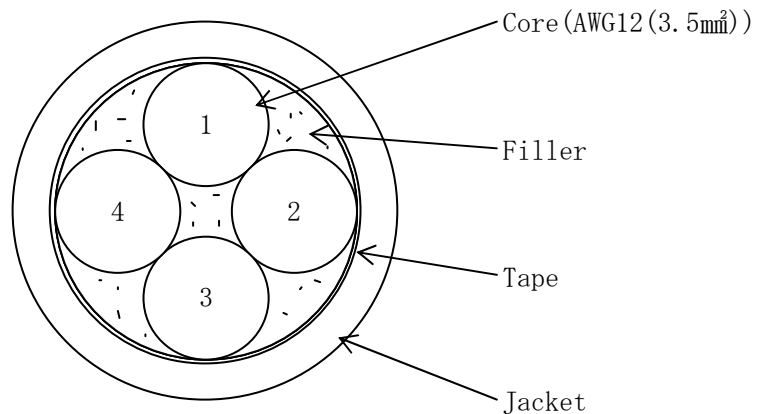

CoreNo.	Colors
1	Black
2	White
3	Red
4	Green

NOT TO SCALE